


**-60V P-CHANNEL ENHANCEMENT MODE MOSFET**

**MAIN CHARACTERISTICS**

<b>I<sub>D</sub></b>	-12A
<b>V<sub>DS</sub></b>	-60V
<b>R<sub>DS(on)-typ(@V<sub>GS</sub>=-10V)</sub></b>	<28mΩ( <b>Typ:20mΩ</b> )

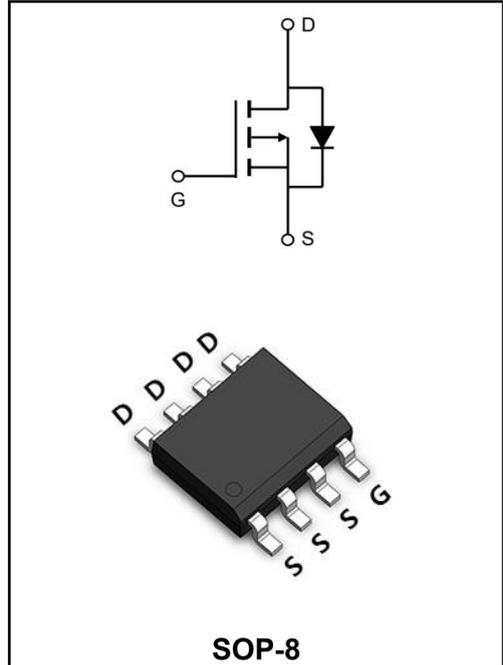

**DESCRIPTION**

The YFW12P06S uses advanced trench technology to provide excellent R<sub>DS(on)</sub>, low gate charge and operation with gate voltages as low as 4.5V. This device is suitable for use as a Battery protection or in other Switching application.

**APPLICATION**

- ◆BMS
- ◆Low voltage switch
- ◆Electric tool

**Absolute Maximum Ratings (T<sub>C</sub>=25°C unless otherwise noted)**

Characteristics	Symbols	Value	Units
Drain-Source Voltage	<b>V<sub>DS</sub></b>	-60	<b>V</b>
Gate - Source Voltage	<b>V<sub>GS</sub></b>	±20	<b>V</b>
Continuous Drain Current, -V <sub>GS</sub> @ -10V <sup>1</sup> @T <sub>C</sub> =25°C	<b>I<sub>D</sub></b>	-12	<b>A</b>
Continuous Drain Current, -V <sub>GS</sub> @ -10V <sup>1</sup> @T <sub>C</sub> =100°C	<b>I<sub>D</sub></b>	-8.5	<b>A</b>
Pulsed Drain Current <sup>2</sup>	<b>I<sub>DM</sub></b>	-45	<b>A</b>
Single Pulse Avalanche Energy <sup>3</sup>	<b>E<sub>AS</sub></b>	113	<b>mJ</b>
Total Power Dissipation <sup>4</sup> @T <sub>C</sub> =25°C	<b>P<sub>D</sub></b>	52.1	<b>W</b>
Storage Temperature Range	<b>T<sub>STG</sub></b>	-55 to +150	<b>°C</b>
Operating Junction Temperature Range	<b>T<sub>J</sub></b>	-55 to +150	<b>°C</b>
Thermal Resistance Junction-Ambient <sup>1</sup>	<b>R<sub>θJA</sub></b>	85	<b>°C/W</b>
Thermal Resistance Junction to Case <sup>1</sup>	<b>R<sub>θJC</sub></b>	2.4	<b>°C/W</b>


**Electrical Characteristics (TC=25°C unless otherwise noted)**

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=-250\mu A$	$BV_{DSS}$	-60	-68		<b>V</b>
$BV_{DSS}$ Temperature Coefficient	Reference to 25°C, $I_D=-1mA$	$\Delta BV_{DSS}/\Delta T_J$		-0.035		<b>V/°C</b>
Static Drain-Source On-Resistance <sup>2</sup>	$V_{GS}=-10V, I_D=-12A$	$R_{DS(ON)}$		20	28	<b>mΩ</b>
	$V_{GS}=-4.5V, I_D=-8A$			26	33	
Gate Threshold Voltage	$V_{GS}=V_{DS}, I_D=-250\mu A$	$V_{GS(th)}$	-1.0	-1.6	-2.5	<b>V</b>
$V_{GS(th)}$ Temperature Coefficient		$\Delta V_{GS(th)}$		4.28	---	<b>mV/°C</b>
Drain-Source Leakage Current	$V_{DS}=-48V, V_{GS}=0V, T_J=25^\circ C$	$I_{DSS}$			1	<b>μA</b>
	$V_{DS}=-48V, V_{GS}=0V, T_J=55^\circ C$				5	
Gate-Source Leakage Current	$V_{GS}=\pm 20V, V_{DS}=0V$	$I_{GSS}$			$\pm 100$	<b>nA</b>
Forward Transconductance	$V_{DS}=-10V, I_D=-18A$	$g_{fs}$		23		<b>S</b>
Gate Resistance	$V_{DS}=0V, V_{GS}=0V, f=1MHz$	$R_g$		7		<b>Ω</b>
Total Gate Charge (-4.5V)	$V_{DS}=-20V$ $V_{GS}=-4.5V$ $I_D=-12A$	$Q_g$		25		<b>nC</b>
Gate-Source Charge		$Q_{gs}$		6.7		
Gate-Drain Charge		$Q_{gd}$		5.5		
Turn-On Delay Time	$V_{DD}=-15V$ $V_{GS}=-10V$ $R_G=3.3\Omega$ $I_D=-1A$	$t_{d(on)}$		38		<b>ns</b>
Rise Time		$T_r$		23.6		
Turn-Off Delay Time		$t_{d(OFF)}$		100		
Fall Time		$t_f$		6.8		
Input Capacitance	$V_{DS}=-15V$ $V_{GS}=0V$ $f=1MHz$	$C_{iss}$		3635		<b>pF</b>
Output Capacitance		$C_{oss}$		224		
Reverse Transfer Capacitance		$C_{rss}$		141		
Continuous Source Current <sup>1,5</sup>	$V_G=V_D=0V$ , Force Current	$I_S$			-35	<b>A</b>
Pulsed Source Current <sup>2,5</sup>		$I_{SM}$			-70	<b>A</b>
Diode Forward Voltage <sup>2</sup>	$V_{GS}=0V, I_S=-1A, T_J=25^\circ C$	$V_{SD}$			-1	<b>V</b>


**Note :**

- 1、The data tested by surface mounted on a 1 inch 2 FR-4 board with 2OZ copper.
- 2、The data tested by pulsed , pulse width  $\leq 300\mu s$  , duty cycle  $\leq 2\%$
- 3、The  $E_{AS}$  data shows Max. rating . The test condition is  $V_{DD}=-48V, V_{GS}=-10V, L=0.1mH, I_{AS}=-47.6A$
- 4、The power dissipation is limited by 150°C junction temperature
- 5、The data is theoretically the same as  $I_D$  and  $I_{DM}$  , in real applications , should be limited by total power dissipation.


**Typical Characteristics**

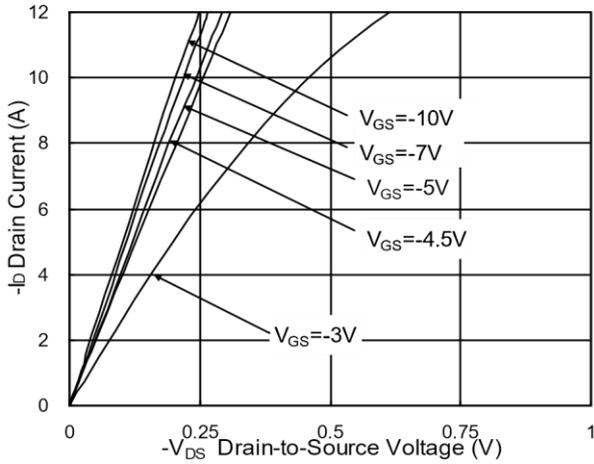


**Fig.1 Typical Output Characteristics**

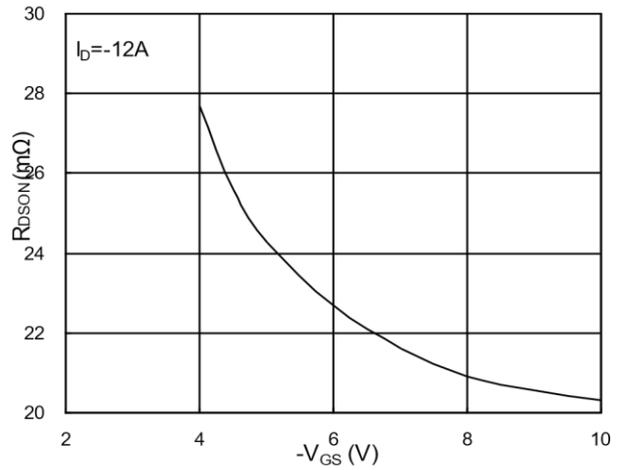


**Fig.2 On-Resistance v.s Gate-Source**

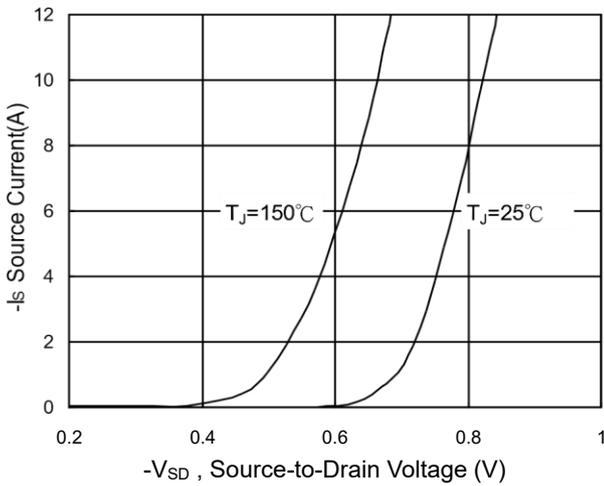


**Fig.3 Forward Characteristics Of Reverse**

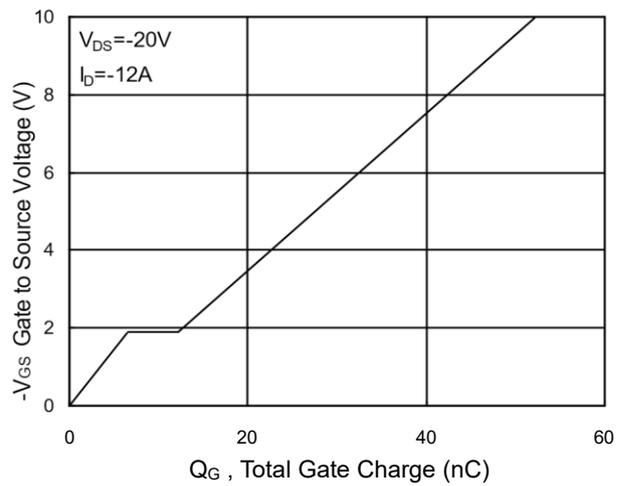


**Fig.4 Gate-Charge Characteristics**

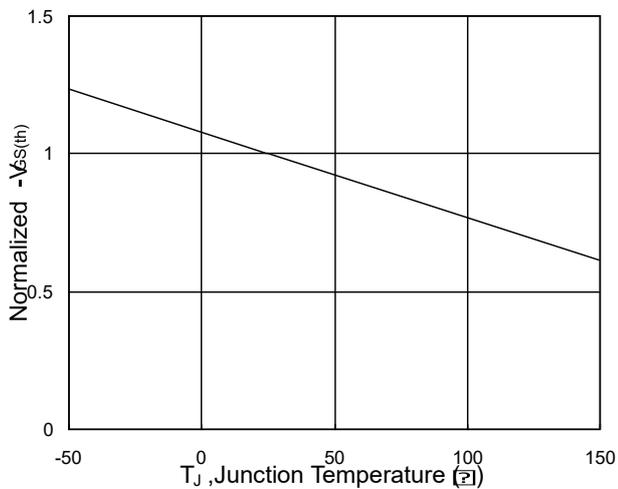


**Fig.5 Normalized  $V_{GS(th)}$  v.s  $T_J$**

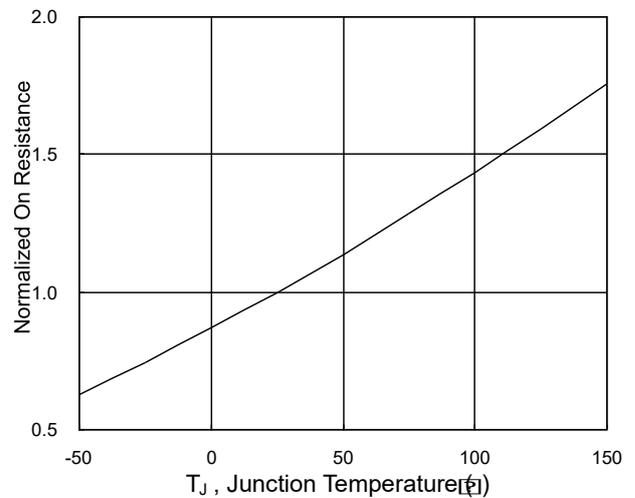


**Fig.6 Normalized  $R_{DSON}$  v.s  $T_J$**

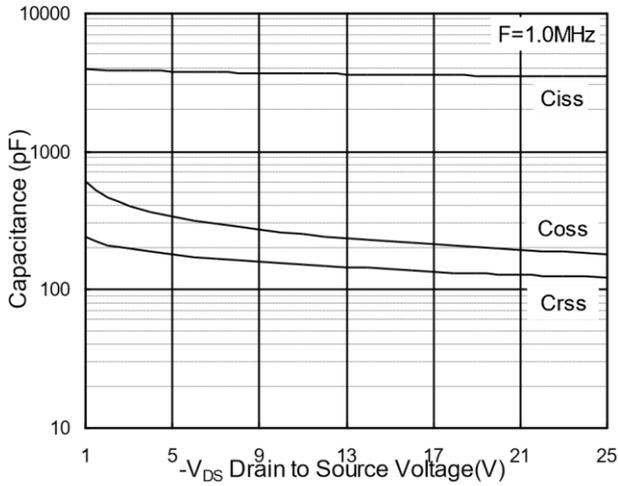


**Fig.7 Capacitance**

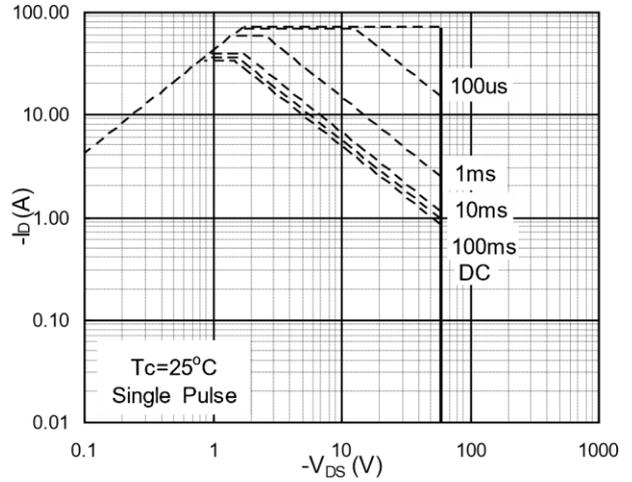


**Fig.8 Safe Operating Area**

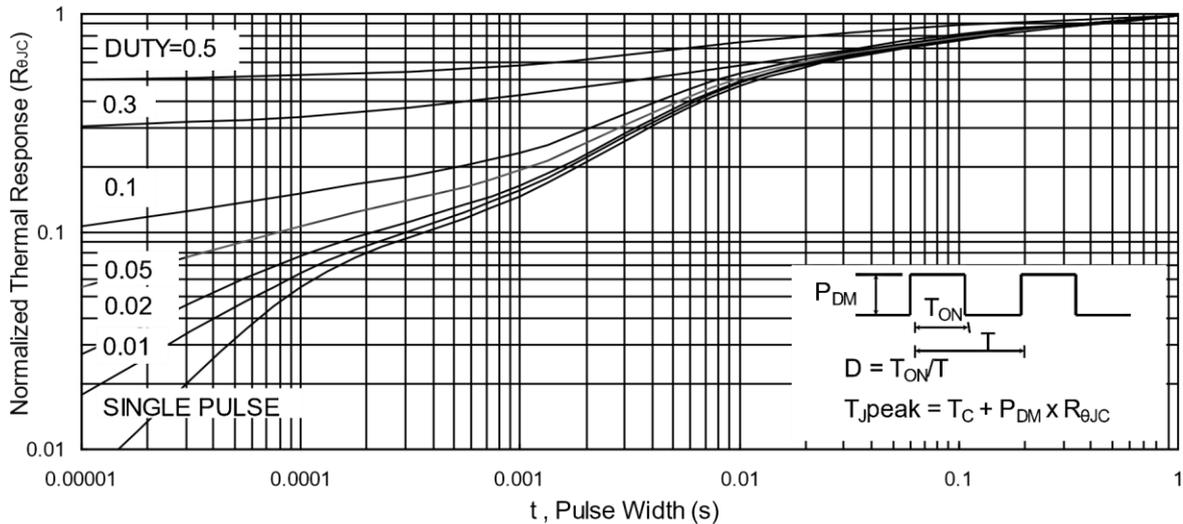

**Fig.9 Normalized Maximum Transient Thermal Impedance**

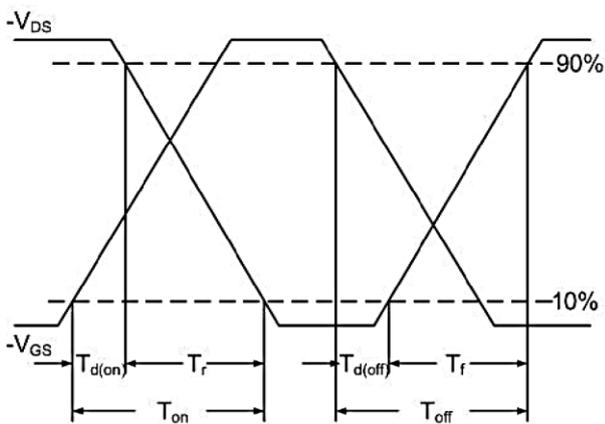


**Fig.10 Switching Time Waveform**

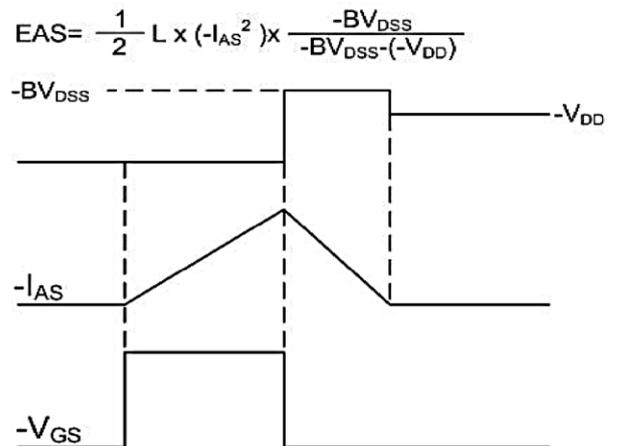

**Fig.11 Unclamped Inductive Waveform**

**Marking Diagram**

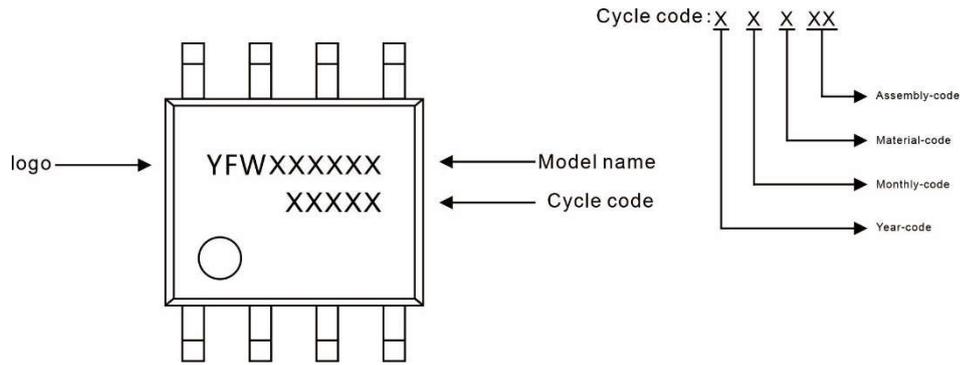

**Ordering information**


Package	Packing Description	Packing Quantity
SOP-8	Tape/Reel, 13" reel	3000PCS/Reel 30000PCS/Carton

**Package Dimensions**

**SOP-8**

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.35	1.75	0.053	0.069
A1	0.10	0.25	0.004	0.010
A2	1.35	1.50	0.053	0.059
b	0.35	0.55	0.014	0.022
c	0.15	0.25	0.006	0.010
D	4.80	5.00	0.189	0.197
D1	3.10	3.50	0.122	0.138
E	5.80	6.20	0.228	0.244
E1	3.80	4.00	0.150	0.157
E2	2.20	2.60	0.087	0.102
e	1.27 (BSC)		0.050 (BSC)	
L	0.40	1.27	0.016	0.050
θ	0°	8°	0°	8°

**The recommended mounting pad size**

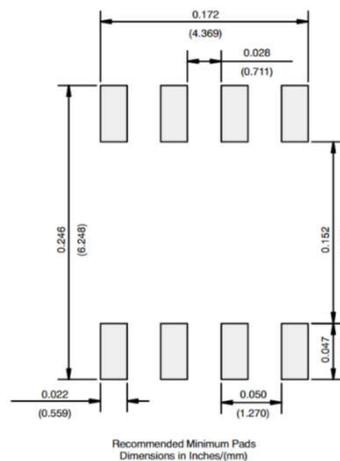

## Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.