


Digital Transistors (Built-in Resistors)

Equivalent Circuit DIGITAL TRANSISTOR (NPN)

FEATURES

- ◆ Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- ◆ The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input.They also have the advantage of almost completely eliminating parasitic effects
- ◆ Only the on/off conditions need to be set for operation, making device design easy

Equivalent Circuit

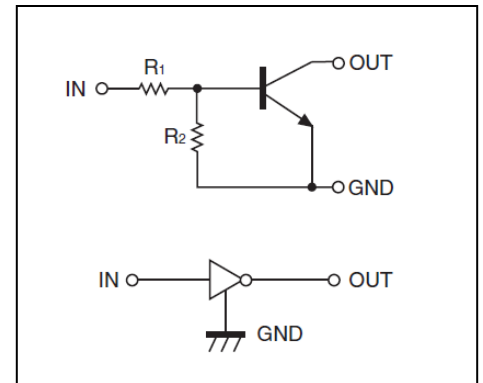

Pin Connenctions And Marking

DTC143ZM Marking:E23		SOT-723 1. IN 2. GND 3. OUT	DTC143ZE Marking:E23		SOT-523 1. IN 2. GND 3. OUT
DTC143ZUA Marking:E23		SOT-323 1. IN 2. GND 3. OUT	DTC143ZKA Marking:E23		SOT-23-3L 1. IN 2. GND 3. OUT
DTC143ZCA Marking:E23		SOT-23 1.IN 2.GND 3.OUT			







Absolute Maximum Ratings $T_a = 25^{\circ}\text{C}$

Symbol	Parameter	Limits(DTC143Z□)						Unit
		M	E	UA	CA	KA	SA	
V_{CC}	Supply Voltage	50						V
V_{IN}	Input Voltage	-5~+30						V
I_O	Output Current	100						mA
P_D	Power Dissipation	100	150	200	200	200	300	mW
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150						$^{\circ}\text{C}$

Electrical Characteristics $T_a = 25^{\circ}\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage	$V_{I(off)}$	$V_{CC}=5V, I_O=100\mu A$	0.5			V
	$V_{I(on)}$	$V_O=0.3V, I_O=5mA$			1.3	V
Output voltage	$V_{O(on)}$	$I_O/I_I=5mA/0.25mA$		0.1	0.3	V
Input current	I_I	$V_I=5V$			1.8	mA
Output current	$I_{O(off)}$	$V_{CC}=50V, V_I=0$			0.5	μA
DC current gain	G_I	$V_O=5V, I_O=10mA$	80			
Input resistance	R_1		3.29	4.7	6.11	k Ω
Resistance ratio	R_2/R_1		8	10	12	
Transition frequency	f_T	$V_O=10V, I_O=5mA, f=100MHz$		250		MHz

Typical Characteristics

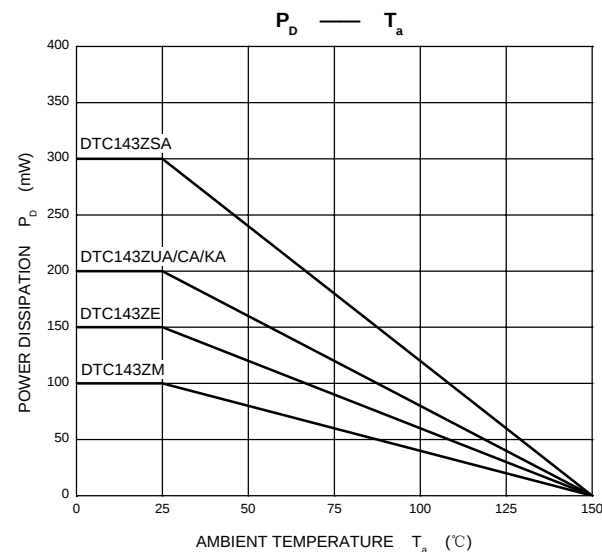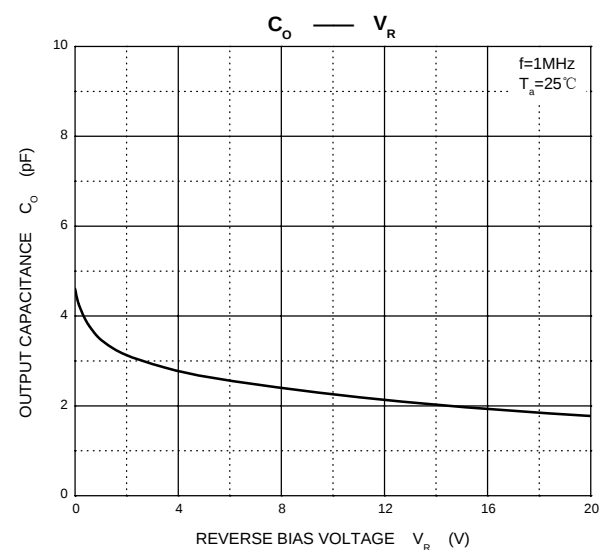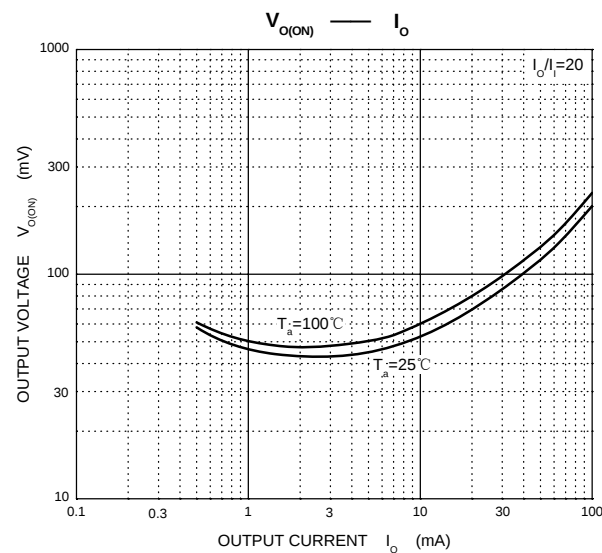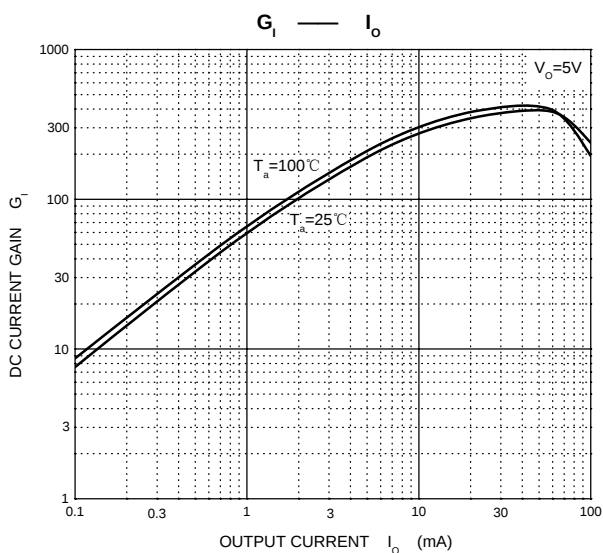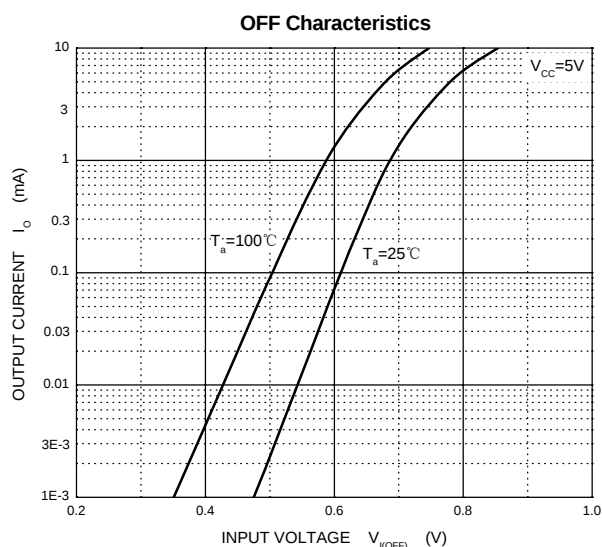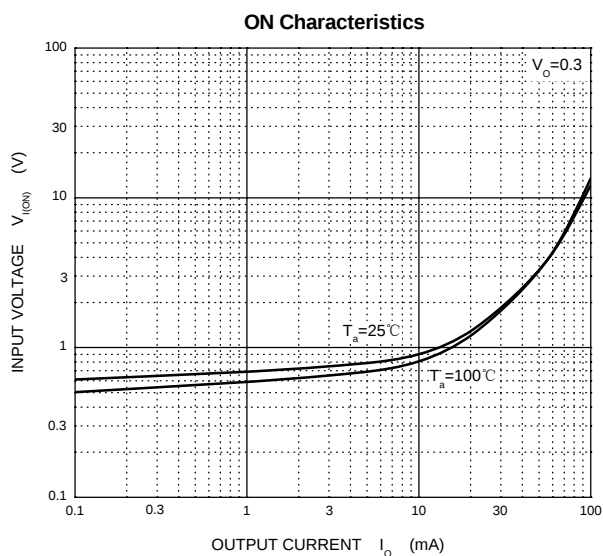

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-723	Tape/Reel, 7" reel	8000pcs/Reel	64000PCS/Box 320000PCS/Carton

Package Dimensions

SOT-723

Dim.	Millimeter (mm)		mil	
	Min.	Max.	Min.	Max.
A	1.10	1.30	43.3	51.2
B	-	0.80	-	31.5
C	1.10	1.30	43.3	51.2
D	0.70	0.90	27.6	35.4
E	0.20	0.30	7.9	11.8
F	0.40	0.50	15.7	19.7
G	0.15	0.25	5.9	9.8
H	0.06	0.16	2.4	6.3
L	0.15	0.25	5.9	9.8

The recommended mounting pad size

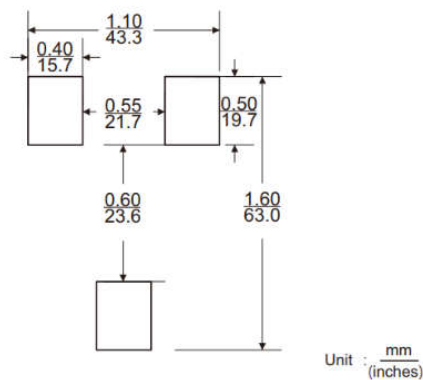

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-523	Tape/Reel, 7" reel	3000pcs/Reel	24000PCS/Box 120000PCS/Carton

Package Dimensions

SOT-523

Dim.	Millimeter (mm)		mil	
	Min.	Max.	Min.	Max.
A	1.50	1.70	59	67
B	0.75	0.85	30	33
C	1.45	1.75	57	69
D	0.50TYP		0.020TYP	
E	0.90	1.10	35	43
G	0.00	0.10	0	4
H	0.60	0.80	24	31
J	0.10	0.20	4	8
K	0.15	0.35	6	14
L	0.26	0.46	10	18

The recommended mounting pad size

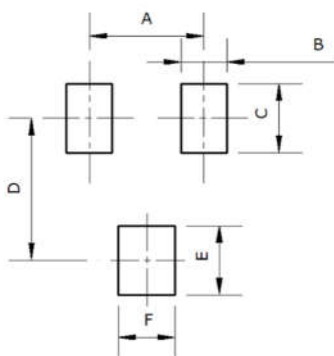

Millimeter (mm)	
Dim.	TYP
A	1.00
B	0.40
C	0.60
D	1.24
E	0.60
F	0.50

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-323	Tape/Reel, 7" reel	3000pcs/Reel	24000PCS/Box 120000PCS/Carton

Package Dimensions

SOT-323

Dim.	Millimeter (mm)		mil	
	Min.	Max.	Min.	Max.
A	0.8	1.1	32	43
A1	0.1		4	
bp	0.3	0.4	12	16
C	0.10	0.25	4	10
D	1.8	2.2	71	87
E	1.15	1.35	45	53
E	1.3		51	
E1	0.65		26	
HE	2.0	2.2	79	87
Lp	0.15	0.45	6	18
Q	0.13	0.23	5.1	9
v	0.2		8	
W	0.2		8	

The recommended mounting pad size



Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT23-3L	Tape/Reel, 7" reel	3000pcs/Reel	24000PCS/Box 120000PCS/Carton

Package Dimensions

SOT23-3L

Dim.	Millimeter (mm)		mil	
	Min.	Max.	Min.	Max.
A	1.05	1.25	41	49.2
A1	0.10		3.93	
A2	1.05	1.15	41	45
b	0.30	0.50	12	20
c	0.10	0.20	3.93	7.9
D	2.82	3.02	111	119
E	1.50	1.70	59	67
E1	2.65	2.95	104	116
e	0.95		37.4	
e1	1.80	2.00	71	78
L	0.30	0.066	12	26
Θ	8°			

The recommended mounting pad size



Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-23	Tape/Reel, 7" reel	3000pcs/Reel	24000PCS/Box 120000PCS/Carton

Package Dimensions

SOT-23

Dim.	Millimeter (mm)		mil	
	Min.	Max.	Min.	Max.
A	0.9	1.15	35	45
A1	0.1		3.9	
bp	0.38	0.48	15	19
C	0.09	0.15	3.54	5.9
D	2.8	3.0	110	118
E	1.2	1.4	47	55
E	1.9		75	
E1	0.95		37	
HE	2.1	2.55	83	100
Lp	0.15	0.45	5.9	18
Q	0.45	0.55	18	22
v	0.2		7.9	
W	0.1		4	

The recommended mounting pad size



Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.