


**1.0A 4Quadrants TRIACs**

**Product Summary**

| Symbol            | Value | Unit |
|-------------------|-------|------|
| $I_{T(AV)}$       | 1.0   | A    |
| $V_{DRM} V_{RRM}$ | 800   | V    |
| $V_{TM}$          | 1.60  | V    |

**Features**

With high ability to withstand the shock loading of large current, With high commutation performances, 4 quadrants products especially recommended for use on inductive load.

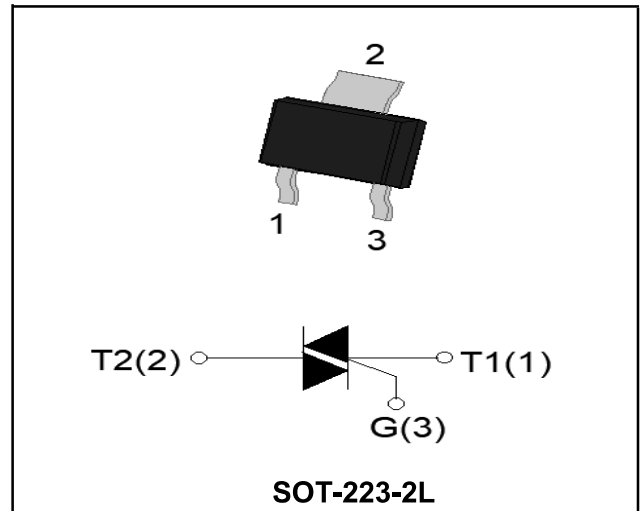

**Application**

Washing machine, vacuums, massager, solid state relay, AC Motor speed regulation and so on.

**Absolute maximum ratings (Ta=25°C unless otherwise noted)**

| Parameter                                                             | Symbol      | Value        |    | Unit             |
|-----------------------------------------------------------------------|-------------|--------------|----|------------------|
| Repetitive peak off-state voltage                                     | $V_{DRM}$   | 800          |    | V                |
| Repetitive peak reverse voltage                                       | $V_{RRM}$   | 800          |    | V                |
| RMS on-state current                                                  | $I_T(RMS)$  | 1            |    | A                |
| Non repetitive surge peak on-state current (full cycle, F=50Hz)       | $I_{TSM}$   | 12           |    | A                |
| $I^2t$ value for fusing (tp=10ms)                                     | $I^2t$      | 0.72         |    | A <sup>2</sup> s |
| Critical rate of rise of on-state current ( $I_G = 2 \times I_{GT}$ ) | $di/dt$     | I - II - III | 20 | A/us             |
| Peak gate current                                                     | $I_{GM}$    | 1            |    | A                |
| Gate peak power                                                       | $P_{GM}$    | 5            |    | W                |
| Average gate power dissipation                                        | $P_{G(AV)}$ | 0.5          |    | W                |
| Junction Temperature                                                  | $T_J$       | -40~+125     |    | °C               |
| Storage Temperature                                                   | $T_{STG}$   | -40 ~+150    |    | °C               |

**Electrical characteristics (TA=25°C, unless otherwise noted)**

| Parameter                                    | Symbol              | Test Condition                                                       |                | Value   | Unit |
|----------------------------------------------|---------------------|----------------------------------------------------------------------|----------------|---------|------|
|                                              |                     |                                                                      |                | Z0607NT |      |
| Gate trigger current                         | I <sub>GT</sub>     | V <sub>D</sub> =12V<br>I <sub>T</sub> =0.1A<br>T <sub>j</sub> =25°C  | I - II -III    | ≤5      | mA   |
|                                              |                     |                                                                      | IV             | ≤7      |      |
| Gate trigger voltage                         | V <sub>GT</sub>     |                                                                      | I - II -III-IV | ≤1.2    | V    |
| Holding current                              | I <sub>H</sub>      | V <sub>D</sub> =12V<br>I <sub>GT</sub> =0.1A<br>T <sub>j</sub> =25°C | I - II -III-IV | ≤5      | mA   |
| latching current                             | I <sub>L</sub>      |                                                                      | I - II -IV     | ≤15     |      |
|                                              |                     |                                                                      | II             | ≤20     | mA   |
| Critical-rate of rise of commutation voltage | dV <sub>D</sub> /dt | V <sub>D</sub> =2/3V <sub>DRM</sub> Gate Open T <sub>j</sub> =125°C  |                | ≥25     | V/us |


**STATIC CHARACTERISTICS**

|                                   |           |                             |                   |            |         |
|-----------------------------------|-----------|-----------------------------|-------------------|------------|---------|
| Forward "on" voltage              | $V_{TM}$  | $I_{TM}=2A$ $t_p=380ps$     |                   | $\leq 1.6$ | V       |
| Repetitive Peak Off-State Current | $I_{DRM}$ | $V_D=V_{DRM}$ $V_R=V_{RRM}$ | $T_j=25^\circ C$  | $\leq 10$  | $\mu A$ |
| Repetitive Peak Reverse Current   | $I_{RRM}$ |                             | $T_j=125^\circ C$ | $\leq 0.5$ | mA      |

**THERMAL RESISTANCES**

|                    |               |                      |            |    |              |
|--------------------|---------------|----------------------|------------|----|--------------|
| Thermal resistance | $R_{th(j-c)}$ | Junction to case(AC) | SOT-223-2L | 25 | $^\circ C/W$ |
|--------------------|---------------|----------------------|------------|----|--------------|

**Ordering Information**

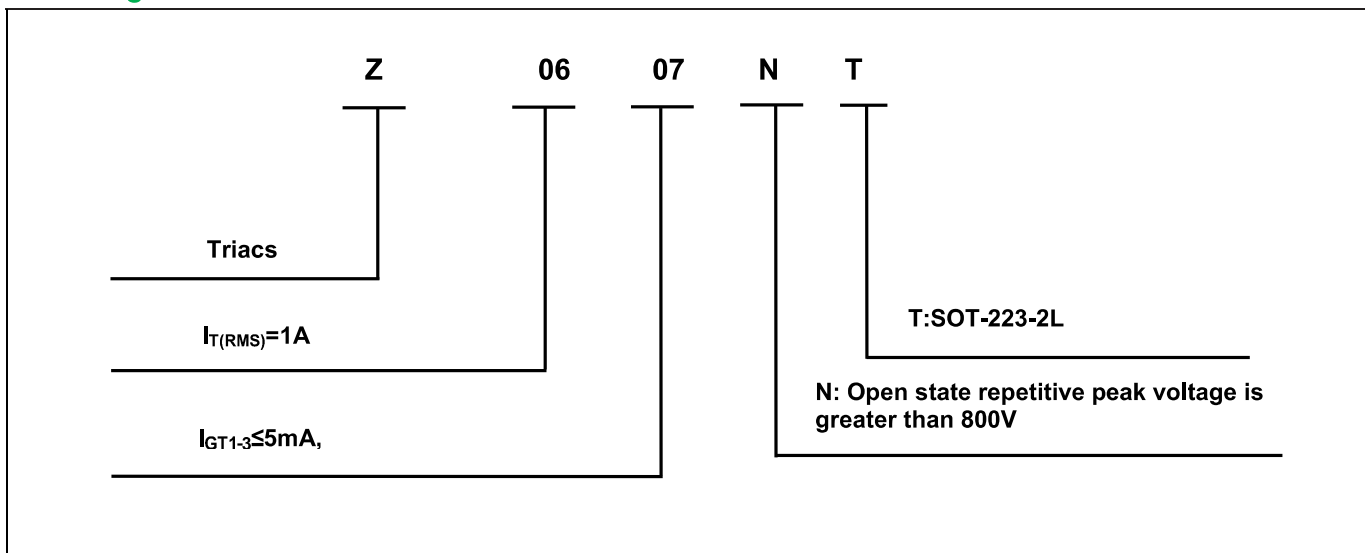

Typical Characteristics

FIG1 Maximum power dissipation versus RMS on-state current

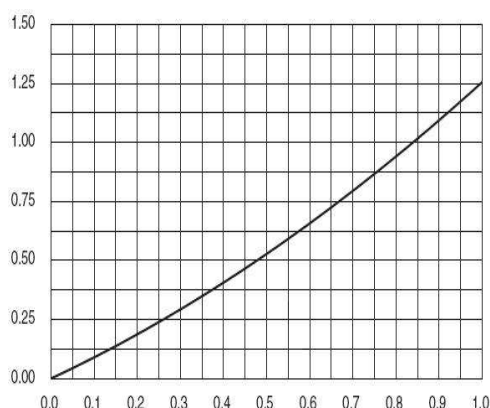


FIG2 RMS on-state current versus case temperature

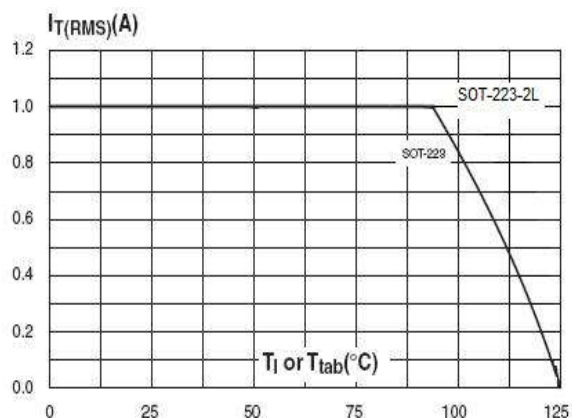


FIG3 Surge peak on-state current versus number of cycles

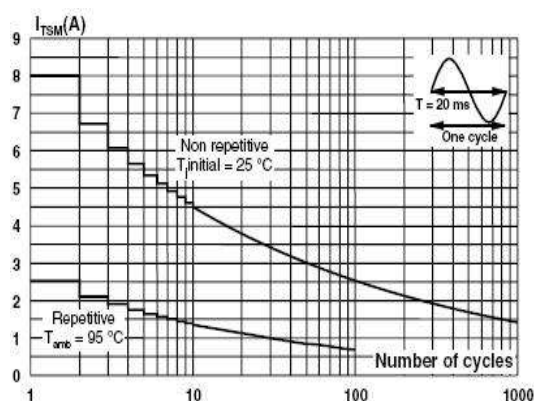


FIG4 On-state characteristics (maximum values)

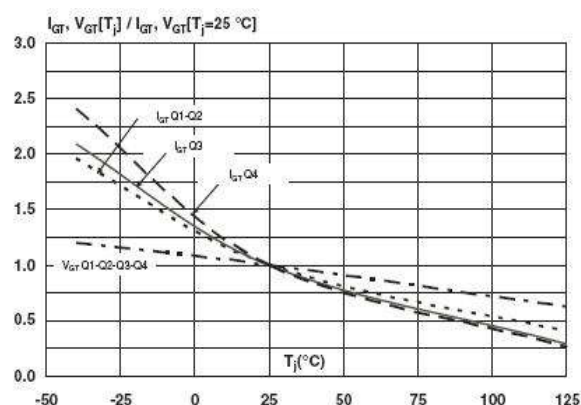


FIG5 Non-repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 20\text{ms}$ , and corresponding value of  $I^2 t$  ( $dI/dt < 100\text{A}/\mu\text{s}$ )


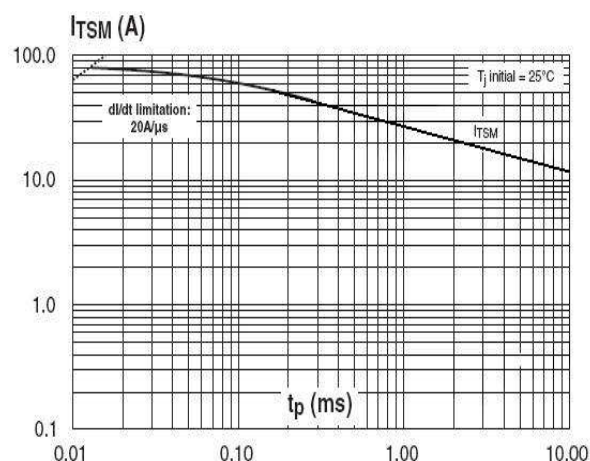


FIG6 Relative variations of gate trigger current, holding current and latching current versus junction temperature

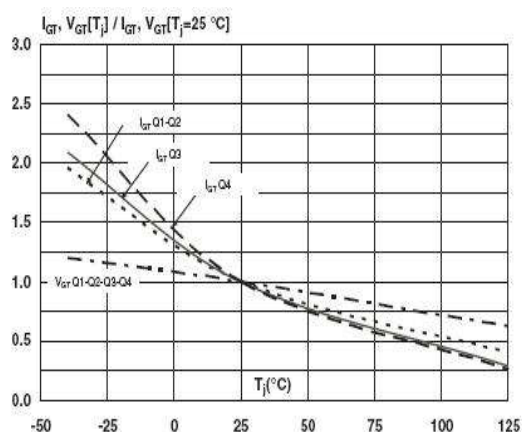

**Ordering information**


| Package           | Packing Description | Base Quantity | Packing Quantity            |
|-------------------|---------------------|---------------|-----------------------------|
| <b>SOT-223-2L</b> | Tape/Reel, 7" reel  | 1000pcs/Reel  | 6000PCS/Box 30000PCS/Carton |
|                   | Tape/Reel, 13" reel | 2500pcs/Reel  | 5000PCS/Box 30000PCS/Carton |

**Package Dimensions**

**SOT-223-2L**

| Dlm | Millimeter |      | Inches |       |
|-----|------------|------|--------|-------|
|     | Min.       | Max. | Min.   | Max.  |
| A   | 1.50       | 1.80 | 0.059  | 0.071 |
| A1  | 0.00       | 0.10 | 0.000  | 0.004 |
| A2  | 1.50       | 1.70 | 0.059  | 0.067 |
| c   | 0.20       | 0.30 | 0.008  | 0.012 |
| D   | 6.40       | 6.60 | 0.252  | 0.260 |
| D1  | 2.90       | 3.10 | 0.114  | 0.122 |
| E   | 3.30       | 3.70 | 0.130  | 0.146 |
| E1  | 6.85       | 7.15 | 0.270  | 0.281 |
| e1  | 4.40       | 4.80 | 0.173  | 0.189 |
| L   | 1.65       | 1.85 | 0.065  | 0.073 |
| L1  | 0.90       | 1.15 | 0.035  | 0.045 |

**The recommended mounting pad size**

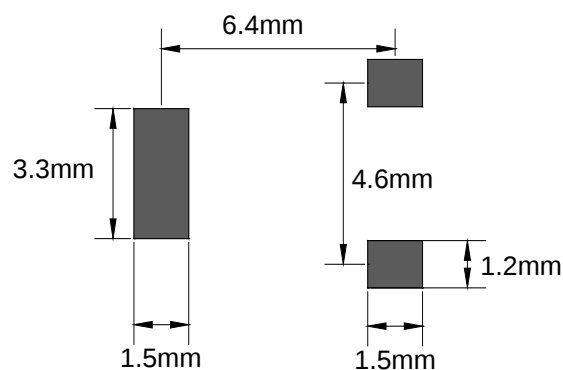

## Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.