


PNP Plastic-Encapsulate Transistors

Applications

- High-Fidelity Audio Output Amplifier
- General Purpose Power Amplifier

Features

- High Current Capability: $I_C = -15A$
- High Frequency : 30MHz.
- High voltage $BV_{CEO} = -230V$
- Complement to 2SC5200

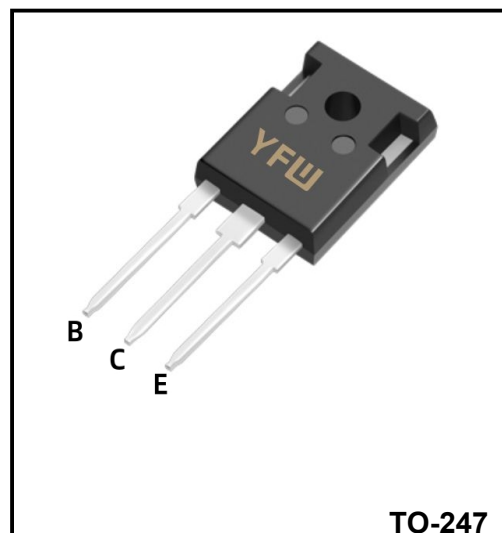

TO-247

Absolute Maximum Rating (Ta= 25°C unless otherwise noted)

Parameter	Symbol	Ratings	Unit
Collector-Base Voltage	BV_{CBO}	-230	V
Collector-Emitter Voltage	BV_{CEO}	-230	V
Emitter-Base Voltage	BV_{EBO}	-5	V
Collector Current	I_C	-15	A
Base Current	I_B	-1.5	A
Power Dissipation	P_D	130	W
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-40~150	°C

* These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

Thermal Characteristics (Ta= 25°C unless otherwise noted)

Parameter	Symbol	Max.	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.96	°C/W

* Device mounted on minimum pad size

Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	BV_{CBO}	$I_C = -5mA, I_E = 0$	-230			V
Collector-emitter breakdown voltage	BV_{CEO}	$I_C = -10mA, I_B = 0$	-230			V
Emitter-base breakdown voltage	BV_{EBO}	$I_E = -5mA, I_C = 0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB} = -230V, I_E = 0$			-5	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = -5V, I_C = 0$			-5	μA
DC current gain	$h_{FE}(1)$	$V_{CE} = -5V, I_C = -1A$	55		160	
	$h_{FE}(2)$	$V_{CE} = -5V, I_C = -7A$	35	60		
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -8A, I_B = -0.8A$		-0.4	-3.0	V
Base-emitter on voltage	$V_{BE(on)}$	$V_{CE} = 5V, I_C = 7A$		-1.0	-1.5	V
Transition frequency	f_T	$V_{CE} = -5V, I_C = -1A,$		30		MHz
Output Capacitance	C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$		360		pF

* Pulse Test: Pulse Width=20 μs , Duty Cycle

 $h_{FE}(1)$ Classification

Classification	2SA1943-R	2SA1943-O
Range	55 ~ 110	80 ~ 160

Typical Characteristics

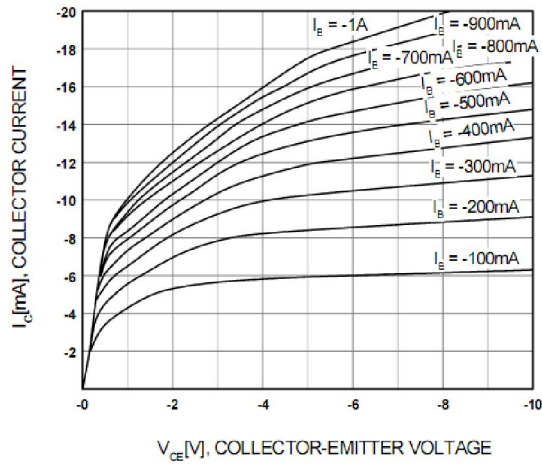


Figure 1. Static Characteristic

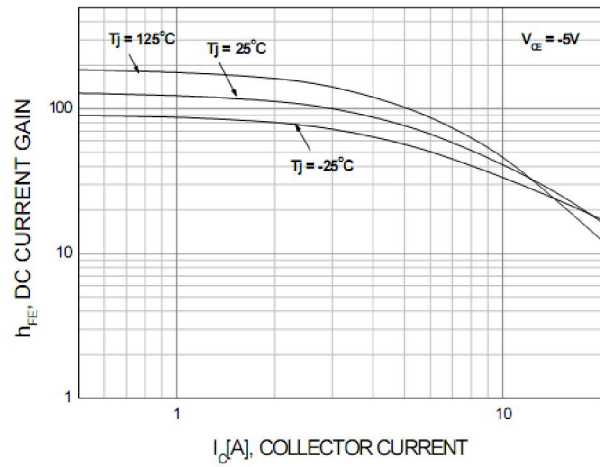


Figure 2. DC current Gain

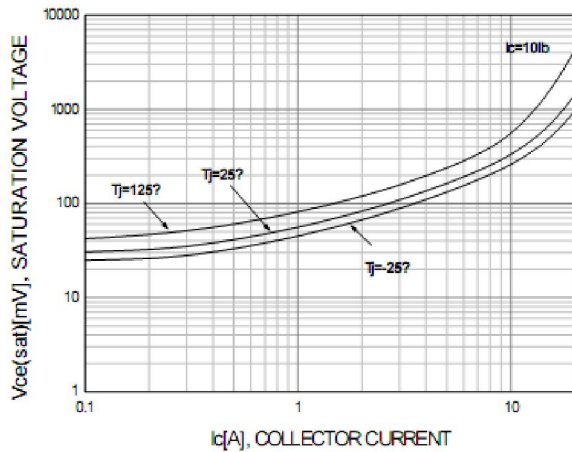


Figure 3. Collector-Emitter Saturation Voltage

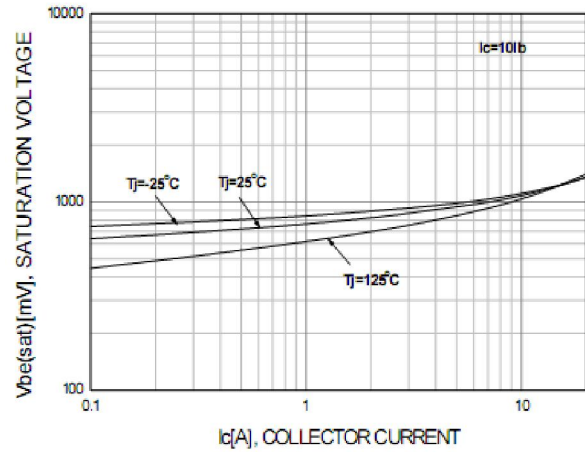


Figure 4. Base-Emitter Saturation Voltage

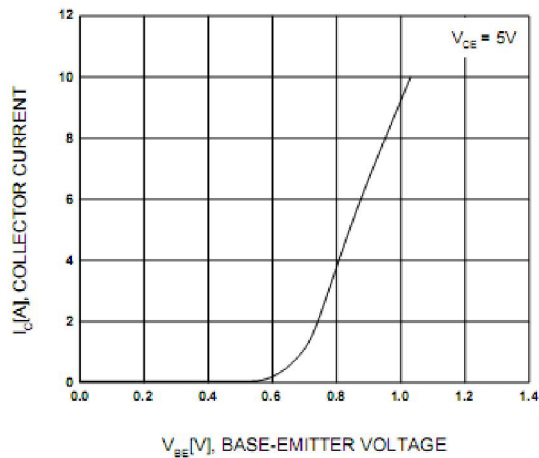


Figure 5. Base-Emitter On Voltage


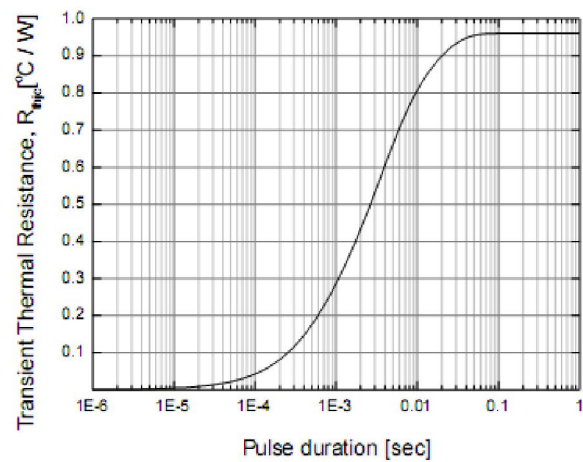


Figure 6. Thermal Resistance

Marking Diagram

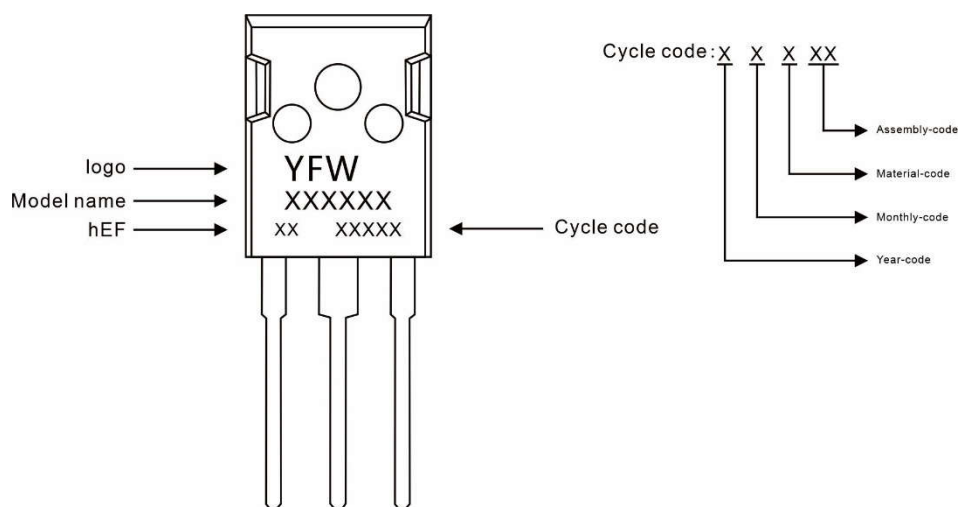

Ordering information

Model name	Package	Unit Weight	Base Quantity	Packing Quantity
2SA1943	TO-247	0.209oz(5.93g)	30pcs/tube	600PCS/Box 2400PCS/Carton

Package Dimensions

TO-247

Symbol	Dimensions in mm		Dimensions in Inch	
	Min.	Max.	Min.	Max.
A	4.90	5.10	0.193	0.201
A1	1.90	2.10	0.075	0.083
A2	2.29	2.54	0.090	0.100
b	1.00	1.40	0.039	0.055
b1	2.00	2.20	0.079	0.087
b2	3.00	3.20	0.118	0.126
c	0.50	0.70	0.020	0.028
D	15.75	16.05	0.620	0.632
E	20.20	20.80	0.795	0.819
e	5.45 (BSC)		0.215 (BSC)	
e1	10.90 (BSC)		0.429 (BSC)	
F	6.05	6.25	0.238	0.246
F1	5.80	6.00	0.228	0.236
L	20.10	20.40	0.791	0.803
L1	4.05	4.35	0.159	0.171
Φ	3.50	3.70	0.138	0.146

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.