


NPN Plastic-Encapsulate Transistors

Applications

- ◆DC-to-DC converters
- ◆Inverters
- ◆Motor control systems
- ◆High-frequency electronic lighting ballast applications

Features

- ◆Fast switching
- ◆Low thermal resistance
- ◆High voltage capability
- ◆Surface-mountable package

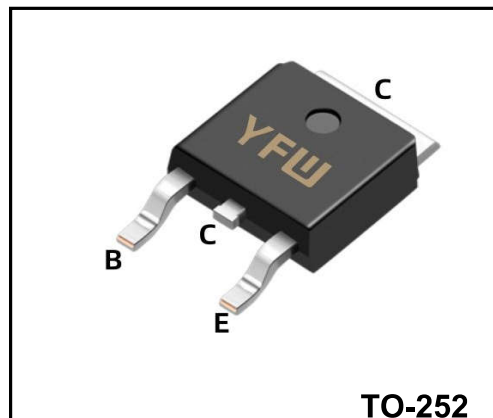

TO-252

Absolute Maximum Rating (Ta=25°C)

Parameter	Symbol	Value	Unit
Collector-base voltage	BV_{CBO}	700	V
Collector-emitter voltage	BV_{CEO}	400	V
Emitter-base voltage	BV_{EBO}	9	V
Collector current (DC)	I_C	4	A
Peak collector current	I_{CM}	8	A
Base current	I_B	2	A
Total power dissipation ($T_{mb} \leq 25^\circ\text{C}$)	P_{tot}	80	W
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-55~150	°C

Thermal characteristics

Parameter	Symbol	Min	Typ	Max	Unit
Thermal resistance, Junction to mounting base	$R_{\theta JA}$		60		°C/W
Thermal resistance, Junction to case	$R_{\theta JMB}$			1.56	°C/W

Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	BV_{CBO}	$I_C = 100\mu A, I_B = 0$	700			V
Collector-emitter breakdown voltage	BV_{CEO}	$I_E = 10mA, I_C = 0$	400			V
Emitter-base breakdown voltage	BV_{EBO}	$I_E = 100\mu A, I_C = 0$	9			V
Collector-base current	I_{CBO}	$V_{CB} = 700V, I_B = 0$			10	μA
Collector-emitter current	I_{CEO}	$V_{CB} = 400V, I_B = 0$			10	mA
Collector cut-off current	I_{EBO}	$V_{CE} = 9V, I_B = 0$			10	μA
DC current gain *	h_{FE}	$V_{CE} = 5V, I_C = 0.1A$ $V_{CE} = 3V, I_C = 0.8A$	30 20		40	
Collector-emitter saturation voltage*	$V_{CE(sat)}$	$I_C = 1.0A, I_B = 0.2A$ $I_C = 3.5A, I_B = 1A$			0.5 1.5	V
Base -emitter saturation voltage*	$V_{BE(sat)}$	$I_C = 3.5A, I_B = 1A$			1.5	V
Transition frequency	f_T	$V_{CE} = 10V, I_B = 0.5A$	4			MHz
Output capacitance	C_{ob}	$V_{CB} = 10V, I_E = 0, f = 1MHz$		65		pF
Storage Time	t_s	$I_C = 2.5A, I_{B(on)} = 0.5A, I_{B(off)} = -0.5A$ $R_L = 60\Omega, V_{BB} = -5V, T_{mb} = 25^\circ C$ resistive load; $t_p = 300\mu s$			3.5	μs
Fall Time	t_f				0.5	μs

* Pulse test: pulse duration $\leq 300 \mu s$, duty cycle $\leq 2 \%$

Typical Characteristics

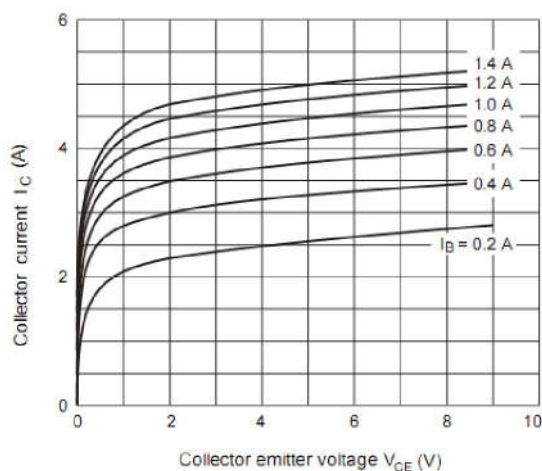


Figure 1. Static Characteristic

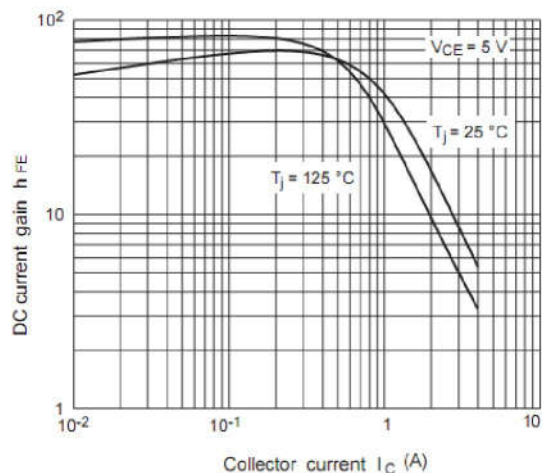


Figure 2. DC current Gain

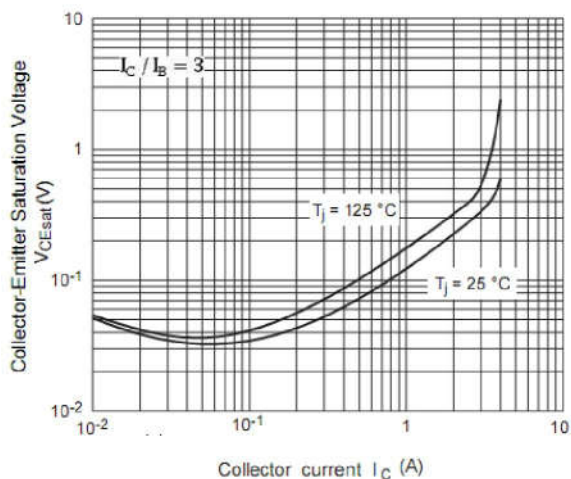


Figure 3. Collector-Emitter Saturation Voltage

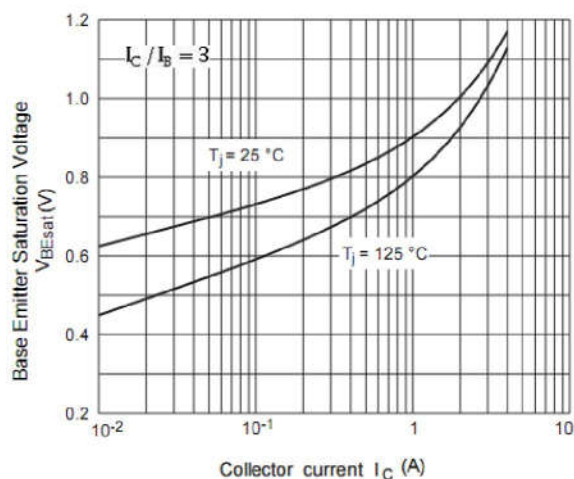


Figure 4. Base-Emitter Saturation Voltage

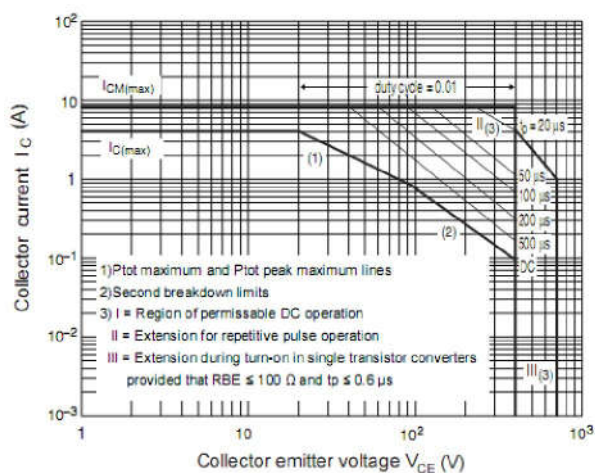


Figure 5. Safe operating area


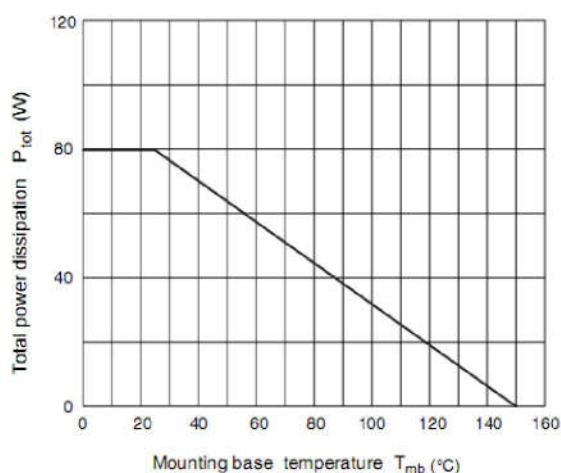


Figure 6. Power Derating

Marking Diagram

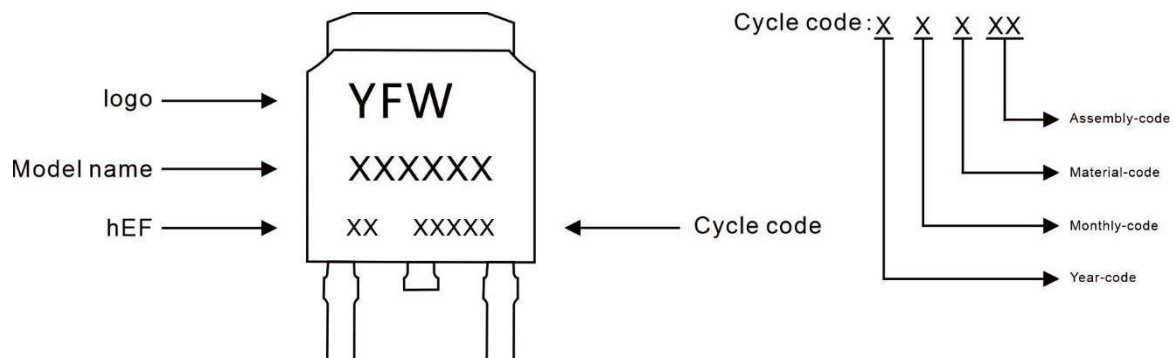

Ordering information

Model name	Package	Unit Weight	Base Quantity	Packing Quantity
YFW13005AD	TO-252	0.011oz(0.32g)	2500pcs/reel	5000pcs/box 25000pcs/Carton

Package Dimensions

TO-252

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	2.20	2.50	0.087	0.098
A1	0.00	0.12	0.000	0.005
A2	2.20	2.40	0.087	0.094
B	1.20	1.60	0.047	0.063
b	0.50	0.70	0.020	0.028
b1	0.70	0.90	0.028	0.035
c	0.40	0.60	0.016	0.024
c1	0.40	0.60	0.016	0.024
D	6.35	6.65	0.250	0.262
D1	5.20	5.40	0.205	0.213
E	5.40	5.70	0.213	0.224
e	2.20	2.40	0.087	0.094
e1	4.40	4.80	0.173	0.189
L	10.00	11.00	0.393	0.433
L1	2.70	3.10	0.106	0.122
L2	1.40	1.80	0.055	0.071
L3	0.90	1.50	0.035	0.059

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.