


3-Terminal 1.0A Negative Voltage Regulator

Description


The 79M15AT series of 3-Terminal medium current negative voltage regulators are monolithic integrated circuits designed as fixed voltage regulators. These regulators employ internal current limiting, thermal shutdown and safe area compensation making them essentially indestructible.

FEATURES

- ◆ No external components required
- ◆ Output current in excess of 1.0A
- ◆ Internal thermal overload
- ◆ Internal short circuit current limiting
- ◆ Output transistor safe area compensation
- ◆ Output voltages of -15V

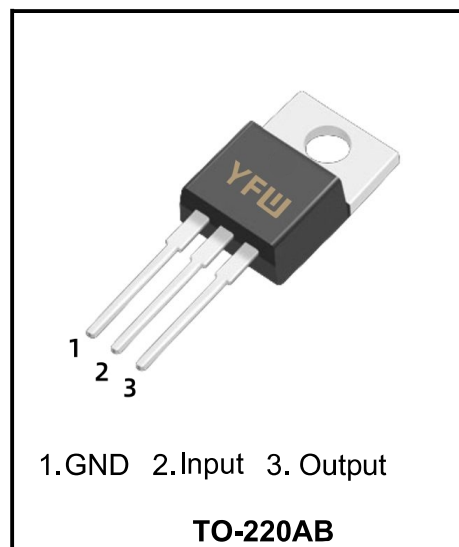

Internal Block Diagram

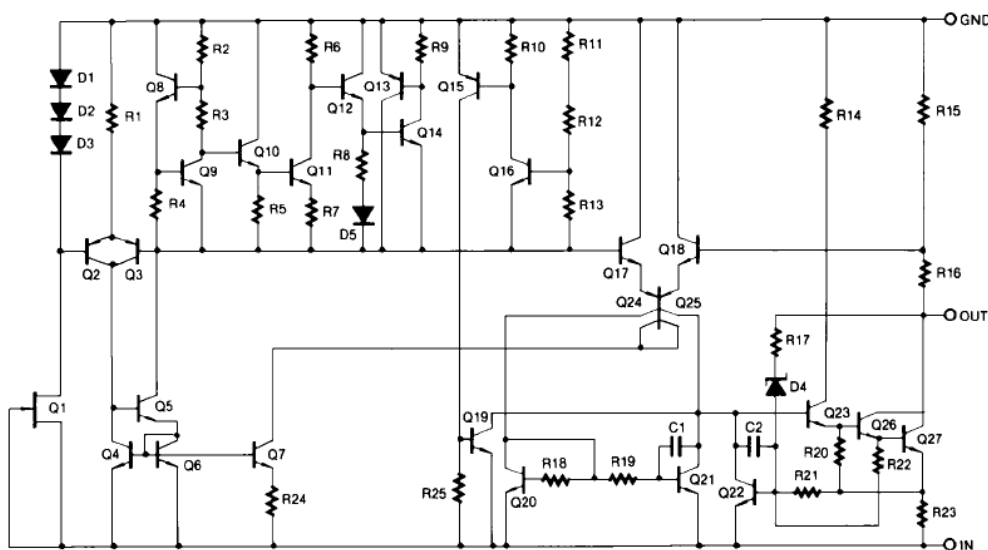

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Input voltage	V_{IN}	-35	V
Output voltage	V_O	-15	V
Operating Junction Temperature Range	T_j	-55 ~ 150	°C
Storage Temperature Range	T_{stg}	-65 ~ 150	°C

Electrical Characteristics (Ta = 25 °C)

 (Refer to the test circuits, $I_O=0.5A$, $V_I=-23V$, $C_I = 2.2\mu F$, $C_O=1\mu F$ unless otherwise specified)

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Output Voltage	V_O	$T_j = 25^{\circ}C$	-14.40	-15.0	-15.60	V
		$I_O = 5mA \sim 1.0A$, $P_O < 15W$ $V_I = -17.5V \sim -30V$	-14.25	-15.0	-15.75	V
Line Regulation (Note)	ΔV_O	$T_j = 25^{\circ}C$			300	mV
					150	
Load Regulation (Note)	ΔV_O	$T_j = 25^{\circ}C$			300	mV
					150	
Quiescent Current	I_Q	$T_j = 25^{\circ}C$			6.0	mA
Quiescent Current Change	ΔI_Q	$I_O = 5mA \sim 1A$			0.5	mA
		$V_I = -17.5 \sim -30.5V$			1.0	
Output Voltage Drift	$\Delta V/\Delta T$	$I_O = 5mA$		-0.9		mV/ $^{\circ}C$
Output Noise Voltage	V_N	$f = 10HZ \sim 100KHZ, T_a = 25^{\circ}C$		250		μV
Ripple Rejection	RR	$f = 120Hz, \Delta V_I = 10V$		60		dB
Dropout Voltage	V_D	$T_j = 25^{\circ}C, I_O = 1A$		2		V
Short Circuit Current	I_{SC}	$T_j = 25^{\circ}C, V_I = -35V$		230		mA
Peak Current	I_{PK}	$T_j = 25^{\circ}C$		1.5		A


Notes:

 Load and line regulation are specified at constant junction temperature. Change in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.


Thermal Resistances

Parameter	Symbol	Value	Unit
Thermal resistance junction to case	$R_{\theta JC}$	5	$^{\circ}C/W$
Thermal resistance junction to ambient	$R_{\theta JA}$	65	$^{\circ}C/W$


Typical Applications

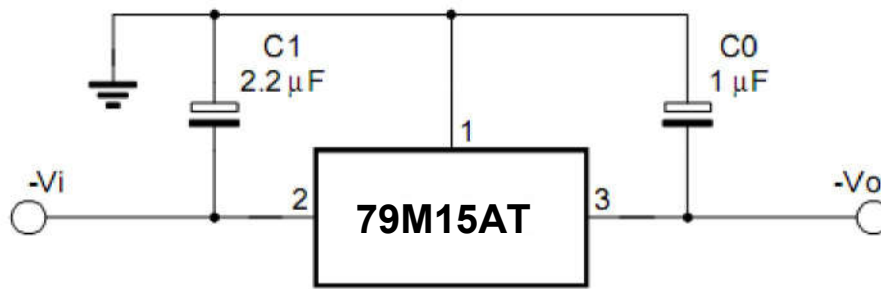

Fixed output regulator

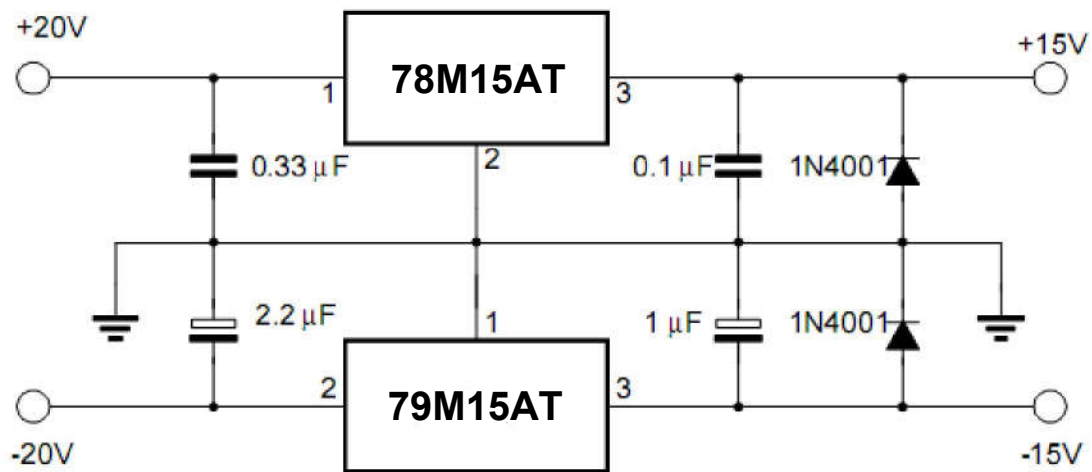


Split power supply($\pm 15V, 1A$)

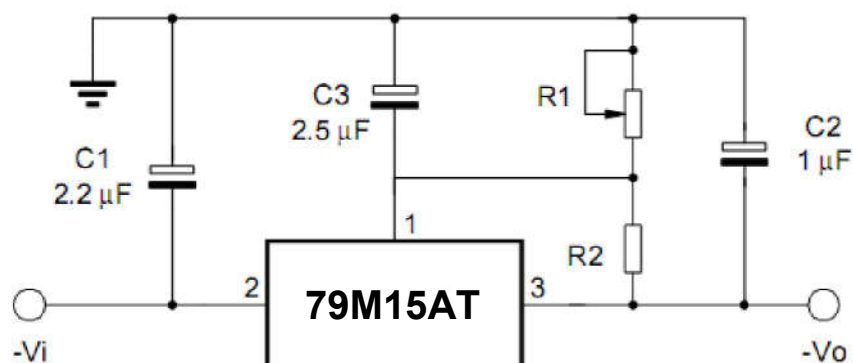

Circuit for increasing output voltage

Marking Diagram

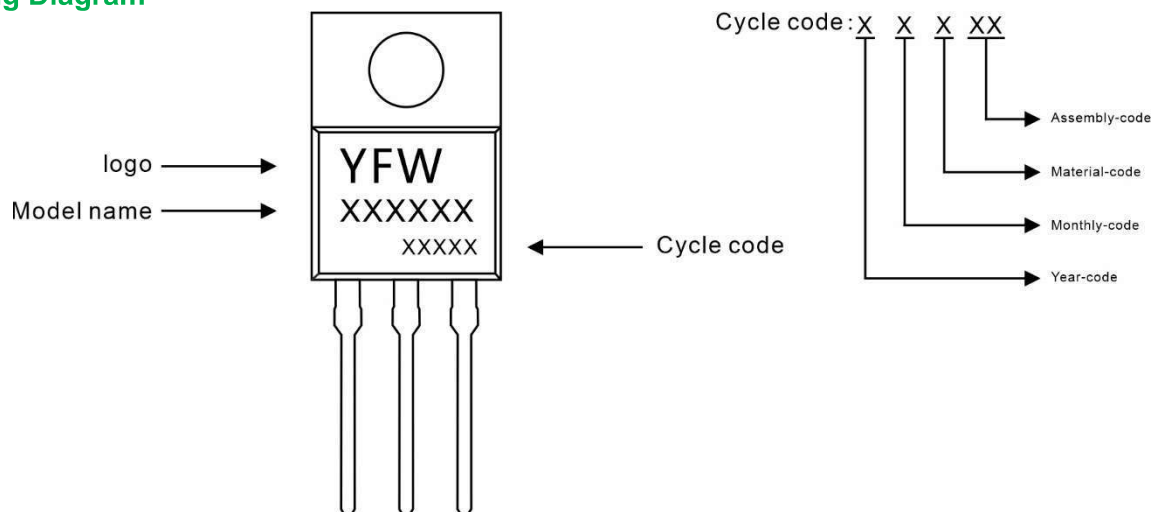

Ordering information

Model name	Package	Unit Weight	Base Quantity	Packing Quantity
79M15AT	TO-220AB	0.07oz(1.96g)	50pcs/tube	1000PCS/Box 5000PCS/Carton

Package Dimensions

TO-220AB

Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.30	4.70	0.169	0.185
A1	2.52	2.82	0.099	0.111
b	0.71	0.91	0.028	0.036
b1	1.17	1.37	0.046	0.054
c	0.30	0.50	0.012	0.020
c1	1.17	1.37	0.046	0.054
D	9.90	10.20	0.390	0.402
E	8.50	8.90	0.335	0.350
E1	12.00	12.50	0.472	0.492
e	2.44	2.64	0.096	0.104
e1	4.88	5.28	0.192	0.208
F	2.60	2.80	0.102	0.110
L	13.20	13.80	0.520	0.543
L1	3.80	4.20	0.150	0.165
Φ	3.60	3.96	0.142	0.156

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.