

Plastic-Encapsulate MOSFETS

P-Channel 20-V(D-S) MOSFET


FEATURE

◆TrenchFET Power MOSFET

APPLICATIONS

◆Load Switch for Portable Devices

◆DC/DC Converter

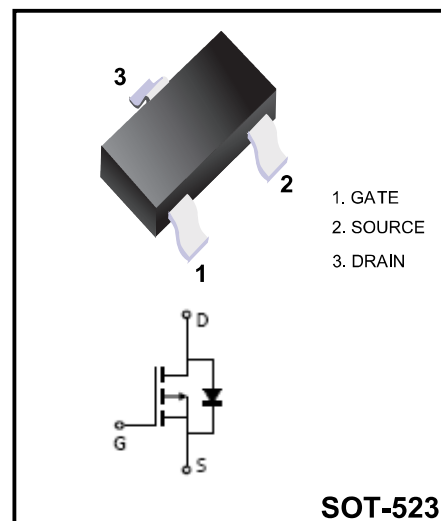

Marking Code

AKS2301T

2301

Maximum ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	±8	
Continuous Drain Current	I_D	-2.1	A
Pulsed Drain Current	I_{DM}	-4.8	
Continuous Source-Drain Diode Current	I_S	-0.72	
Maximum Power Dissipation	P_D	0.35	W
Thermal Resistance from Junction to Ambient($t \leq 5s$)	$R_{\theta JA}$	357	°C/W
Junction Temperature	T_J	150	°C
Storage Temperature	T_{stg}	-55 ~+150	

Electrical characteristics (Ta=25°C unless otherwise noted)






Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Static						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D =-250μA	-20			V
Gate-source threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250μA	-0.4		-1	
Gate-source leakage	I _{GSS}	V _{DS} =0V, V _{GS} =±8V			±100	nA
Zero gate voltage drain current	I _{DSS}	V _{DS} =-20V, V _{GS} =0V			-1	μA
Drain-source on-state resistance ^a	R _{DS(on)}	V _{GS} =-4.5V, I _D =-1A		0.090	0.120	Ω
		V _{GS} =-2.5V, I _D =-0.5A		0.110	0.170	
Forward transconductance ^a	g _{fs}	V _{DS} =-5V, I _D =-1.8A		6.5		S
Dynamic ^b						
Input capacitance	C _{iSS}	V _{DS} =-10V,V _{GS} =0V,f =1MHz		405		pF
Output capacitance	C _{oSS}			75		
Reverse transfer capacitance	C _{rSS}			55		
Total gate charge	Q _g	V _{DS} =-10V,V _{GS} =-4.5V,I _D =-3A		5.5	10	nC
		V _{DS} =-10V,V _{GS} =-2.5V,I _D =-3A		3.3	6	
Gate-source charge	Q _{gs}			0.7		
Gate-drain charge	Q _{gd}			1.3		
Gate resistance	R _g	f =1MHz		6.0		Ω
Turn-on delay time	t _{d(on)}	V _{DD} =-10V, R _L =10Ω, I _D =-1A, V _{GEN} =- 4.5V,R _g =1Ω		11	20	ns
Rise time	t _r			35	60	
Turn-off delay time	t _{d(off)}			30	50	
Fall time	t _f			10	20	
Drain-source body diode characteristics						
Continuous source-drain diode current	I _S	T _C =25℃			-1.3	A
Pulse diode forward current ^a	I _{SM}				-10	
Body diode voltage	V _{SD}	I _S =-0.7A		-0.8	-1.2	V

Notes :

a.Pulse Test : Pulse Width < 300 μ s, Duty Cycle $\leq$ 2%.

b.Guaranteed by design, not subject to production testing.

Typical Characteristics

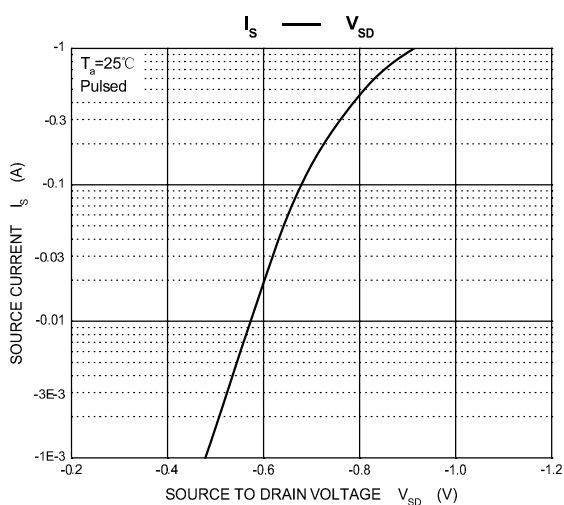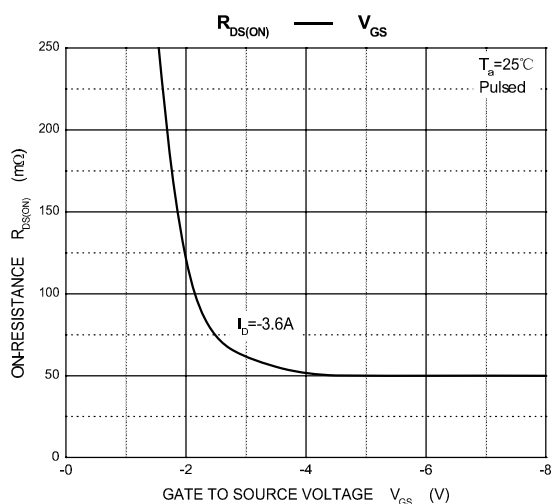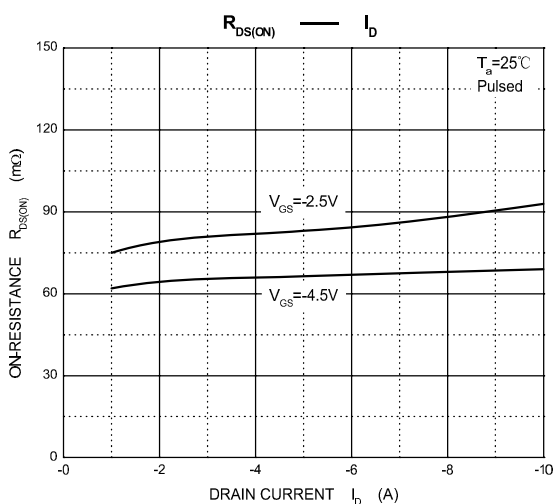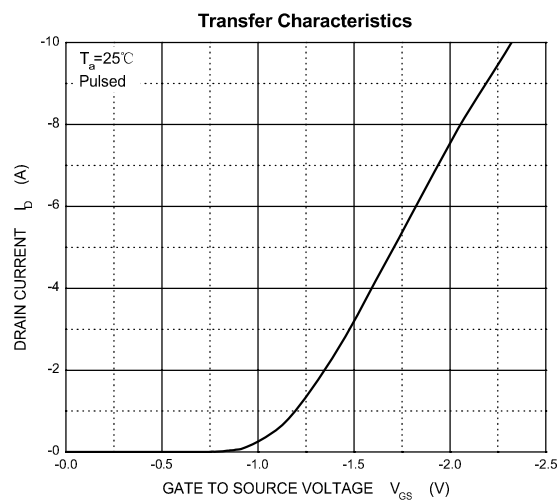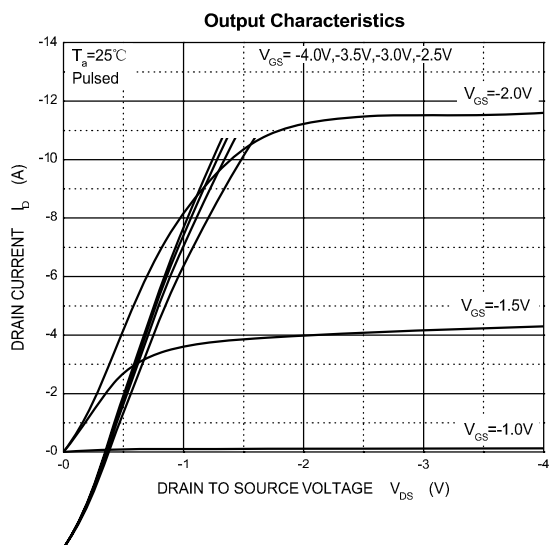

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-523	Tape/Reel, 7" reel	3000pcs/Reel	24000PCS/Box 120000PCS/Carton

Package Dimensions

SOT-523

Dim.	Millimeter (mm)		mil	
	Min.	Max.	Min.	Max.
A	1.50	1.70	59	67
B	0.75	0.85	30	33
C	1.45	1.75	57	69
D	0.50TYP		0.020TYP	
E	0.90	1.10	35	43
G	0.00	0.10	0	4
H	0.60	0.80	24	31
J	0.10	0.20	4	8
K	0.15	0.35	6	14
L	0.26	0.46	10	18

The recommended mounting pad size

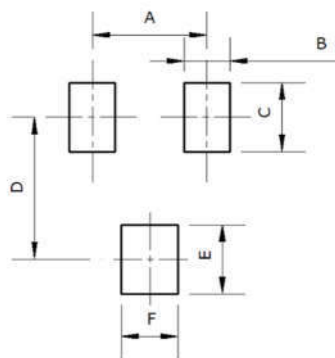

Millimeter (mm)	
Dim.	TYP
A	1.00
B	0.40
C	0.60
D	1.24
E	0.60
F	0.50

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.