

Super Fast Rectifiers

Reverse Voltage - 200V to 800V


Forward Current - 8A

FEATURES

- ◆Glass passivated chip junctions
- ◆Super fast recovery time for switching mode application
- ◆High Forward Surge Capability
- ◆Low Reverse Current
- ◆Lead free in compliance with EU RoHS 2011/65/EU directive

MECHANICAL DATA

- ◆Circuit figure:Single positive
- ◆Leads: Solderable per mil-std-202, Method 208
- ◆Polarity:as marked
- ◆Mounting torque:5 in-lbs maximum
- ◆Terminals:Puretin plated

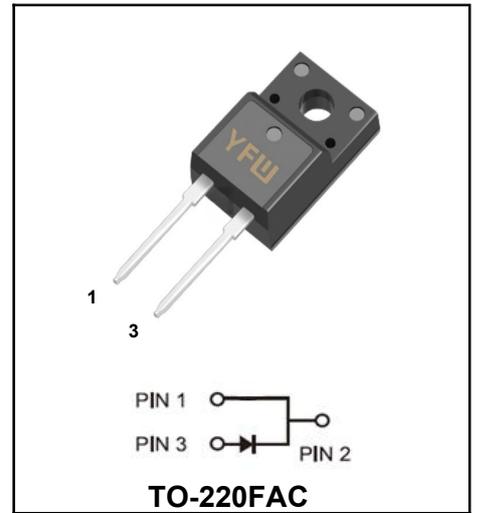

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (TA=25°C)

RATINGS	SYMBOL	MUR820DAF	MUR830DAF	MUR840DAF	MUR850DAF	MUR860DAF	MUR880DAF	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	200	300	400	500	600	800	V
Maximum RMS voltage	V_{RMS}	140	210	280	350	420	560	V
Maximum DC Blocking Voltage	V_{DC}	200	300	400	500	600	800	V
Maximum average forward current	$I_{(AV)}$	8						A
Peak forward surge current,8.3ms single half sine-wave superimposed on rated load	I_{FSM}	125						A
Typical thermal resistance	$R_{\theta JC}$	4.0						°C/W
Operating junction temperature range	T_J	-55 ~ +150						°C
Storage temperature range	T_{stg}	-55 ~ +150						°C

CHARACTERISTICS

Maximum forward voltage per leg at 8A	V_F	1.0	1.35	1.70	2.8	V
Maximum DC reverse current at rated DC blocking voltage $T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	I_R	5 250				μA
Maximum reverse recovery time(Note 2)	T_{RR}	35				nS

Notes: 1. Thermal resistance from junction to case.
2. Test conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$.

Ratings And Characteristic Curves

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

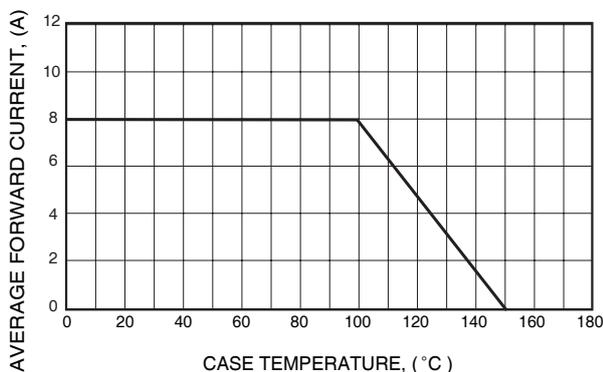


FIG. 3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

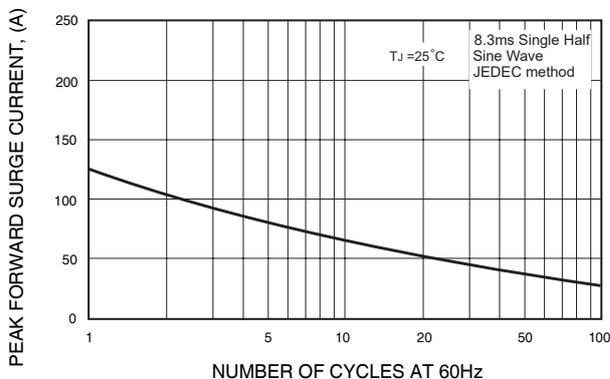


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

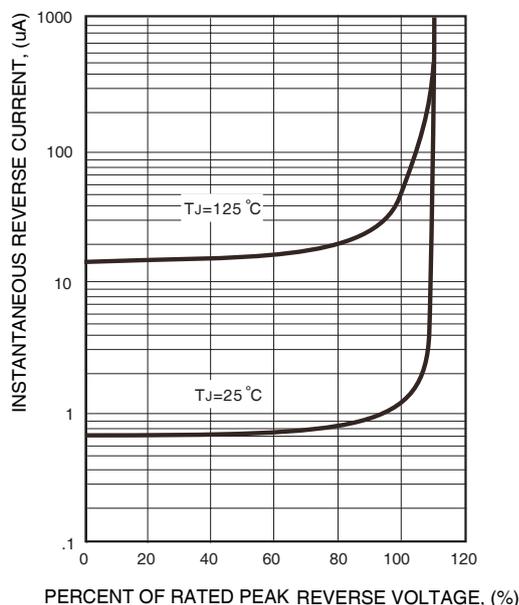


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS



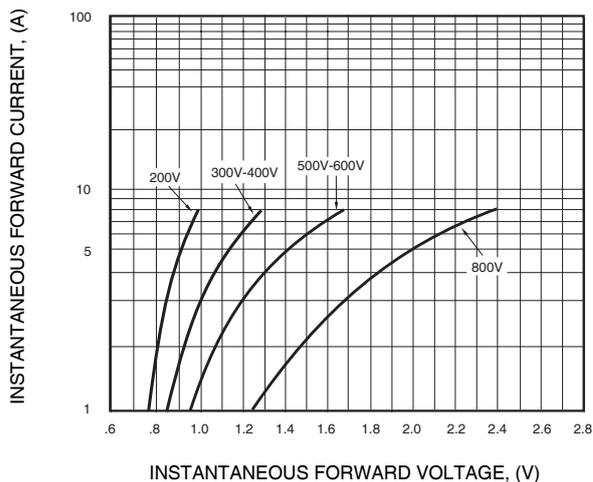



FIG.6- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

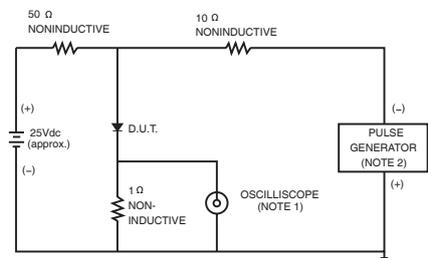

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm.22pF.
2. Rise Time= 10ns max., Source Impedance= 50 ohms.

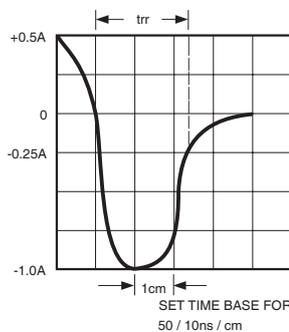

Marking Diagram

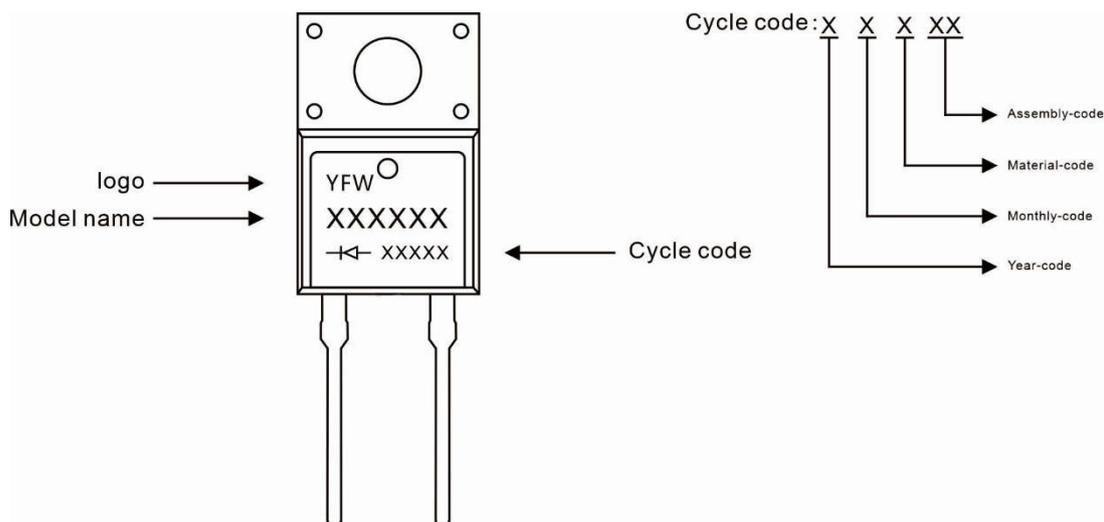

Ordering information

Model name	Package	Unit Weight	Base Quantity	Packing Quantity
MURXXXXXDAF	TO-220FAC	0.06oz(1.7g)	50pcs/tube	1000PCS/Box 5000PCS/Carton

Package Dimensions

TO-220FAC

Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.50	4.90	0.177	0.193
A1	2.34	2.74	0.092	0.108
A2	2.66	2.86	0.105	0.113
b	0.75	0.85	0.030	0.033
b1	1.24	1.44	0.049	0.057
c	0.40	0.60	0.016	0.024
D	10.00	10.32	0.394	0.406
E	15.75	16.05	0.620	0.632
e	4.88	5.28	0.192	0.208
F	3.10	3.5	0.122	0.138
L	12.90	13.50	0.508	0.531
L1	2.90	3.30	0.114	0.130
Φ	3.10	3.30	0.122	0.130

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.